

B MILLING Solid Carbide End Mills

High-performance general milling PM series





2-flute ball nose end mills with straight shank




PM-2BL



● PM-2B series with long shank.

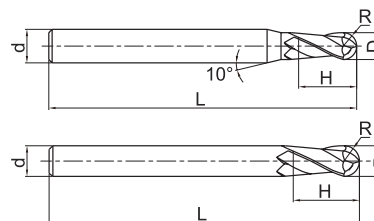

Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-2BL-R1.0	2.0	1.0	6	4	75	2	Picture 1	○
PM-2BL-R1.25	2.5	1.25	6	5	75	2	Picture 1	○
PM-2BL-R1.5	3.0	1.5	6	6	75	2	Picture 1	○
PM-2BL-R1.75	3.5	1.75	6	8	75	2	Picture 1	○
PM-2BL-R2.0	4.0	2.0	6	8	75	2	Picture 1	○
PM-2BL-R2.5	5.0	2.5	6	10	75	2	Picture 1	○
PM-2BL-R2.75	5.5	2.75	6	12	75	2	Picture 1	○
PM-2BL-R3.0	6.0	3.0	6	12	75	2	Picture 2	○
PM-2BL-R3.5	7.0	3.5	8	14	75	2	Picture 1	○
PM-2BL-R4.0	8.0	4.0	8	16	100	2	Picture 2	○
PM-2BL-R4.5	9.0	4.5	10	18	100	2	Picture 1	○
PM-2BL-R5.0	10.0	5.0	10	20	100	2	Picture 2	○
PM-2BL-R6.0	12.0	6.0	12	24	100	2	Picture 2	○
PM-2BL-R7.0	14.0	7.0	14	28	100	2	Picture 2	○
PM-2BL-R8.0	16.0	8.0	16	32	150	2	Picture 2	○
PM-2BL-R10.0	20.0	10.0	20	40	150	2	Picture 2	○

● Stock available ○ Make-to-order

➤ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B382-B383




2-flute ball nose end mills with straight shank, long neck and short cutting edge




PM-2BFP



- High-rigidity short cutting edge, suitable for heavy cutting.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)							Number of teeth Z	Geometry	Stock
	D	R	H	d ₁	M	d	L			
PM-2BFP-R0.5	1.0	0.5	1	0.95	2.5	6	75	2	Picture 1	○
PM-2BFP-R0.75	1.5	0.75	1.5	1.45	3	6	75	2	Picture 1	○
PM-2BFP-R1.0	2.0	1.0	2	1.95	4	6	75	2	Picture 1	○
PM-2BFP-R1.5	3.0	1.5	3	2.85	6	6	75	2	Picture 1	○
PM-2BFP-R2.0	4.0	2.0	4	3.85	8	6	75	2	Picture 1	○
PM-2BFP-R2.5	5.0	2.5	5	4.85	10	6	75	2	Picture 1	○
PM-2BFP-R3.0	6.0	3.0	6	5.8	12	6	75	2	Picture 2	○
PM-2BFP-R4.0	8.0	4.0	8	7.8	16	8	100	2	Picture 2	○
PM-2BFP-R5.0	10.0	5.0	10	9.6	20	10	100	2	Picture 2	○
PM-2BFP-R6.0	12.0	6.0	12	11.5	24	12	100	2	Picture 2	○
PM-2BFP-R8.0	16.0	8.0	16	15.5	32	16	150	2	Picture 2	○
PM-2BFP-R10.0	20.0	10.0	20	19.5	40	20	150	2	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B382-B383

B MILLING Solid Carbide End Mills

High-performance general milling PM series





4-flute ball nose end mills with straight shank




PM-4B



- 4-flute ball nose end mill can operate with higher feed speed and machining efficiency, extending tool life in machining high-hardness workpiece.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-4B-R1.5	3.0	1.5	6	6	50	4	Picture 1	○
PM-4B-R2.0	4.0	2.0	6	8	50	4	Picture 1	○
PM-4B-R2.5	5.0	2.5	6	10	50	4	Picture 1	○
PM-4B-R3.0	6.0	3.0	6	12	50	4	Picture 2	○
PM-4B-R4.0	8.0	4.0	8	16	60	4	Picture 2	○
PM-4B-R5.0	10.0	5.0	10	20	75	4	Picture 2	○
PM-4B-R6.0	12.0	6.0	12	24	75	4	Picture 2	○
PM-4B-R7.0	14.0	7.0	14	28	75	4	Picture 2	○
PM-4B-R8.0	16.0	8.0	16	32	100	4	Picture 2	○
PM-4B-R9.0	18.0	9.0	18	36	100	4	Picture 2	○
PM-4B-R10.0	20.0	10.0	20	40	100	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B384



4-flute ball nose end mills with straight and long shank




PM-4BL



- PM-4B series with long shank.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-4BL-R1.5	3.0	1.5	6	6	75	4	Picture 1	○
PM-4BL-R2.0	4.0	2.0	6	8	75	4	Picture 1	○
PM-4BL-R2.5	5.0	2.5	6	10	75	4	Picture 1	○
PM-4BL-R3.0	6.0	3.0	6	12	75	4	Picture 2	○
PM-4BL-R4.0	8.0	4.0	8	16	100	4	Picture 2	○
PM-4BL-R5.0	10.0	5.0	10	20	100	4	Picture 2	○
PM-4BL-R6.0	12.0	6.0	12	24	100	4	Picture 2	○
PM-4BL-R7.0	14.0	7.0	14	28	100	4	Picture 2	○
PM-4BL-R8.0	16.0	8.0	16	32	150	4	Picture 2	○
PM-4BL-R9.0	18.0	9.0	18	36	150	4	Picture 2	○
PM-4BL-R10.0	20.0	10.0	20	40	150	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling toolsSolid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B384

B MILLING Solid Carbide End Mills

High-performance general milling PM series

2-flute ball nose end mills with taper neck








Deep ball nose slot

PM-2BC



- High-rigidity taper neck structure.



Degree of workpiece declining

Ordering number	Basic dimension(mm)										Number of teeth Z	Degree of workpiece declining corresponding actually effective neck length				Stock
	D	R	A ₁	H	l ₂	l ₁	A ₂	d ₁	L	d		0.5°	1°	2°	3°	
PM-2BC05-R0.25-M03	0.5	0.25	0.5°	0.5	3	1.5	7.8°	0.49	50	4	2	3.3	3.5	3.9	4.4	○
PM-2BC05-R0.25-M05					5		6.8°	0.53			2	5.3	5.6	6.2	7.1	○
PM-2BC10-R0.25-M03			1.0°		3		7.8°	0.52			2	-	3.4	3.8	4.3	○
PM-2BC10-R0.25-M05					5		6.9°	0.59			2	-	5.4	6.0	6.8	○
PM-2BC15-R0.25-M03			1.5°		3		7.9°	0.54			2	-	-	3.7	4.1	○
PM-2BC15-R0.25-M05					5		7.0°	0.65			2	-	-	5.8	6.6	○
PM-2BC05-R0.30-M05	0.6	0.30	0.5°	0.6	5	1.6	6.8°	0.62	50	4	2	5.3	5.6	6.2	7.1	○
PM-2BC05-R0.30-M08					8		5.7°	0.68			2	8.3	8.7	9.8	11.1	○
PM-2BC10-R0.30-M05			1.0°		5		6.8°	0.68			2	-	5.4	6.0	6.8	○
PM-2BC10-R0.30-M08					8		5.8°	0.79			2	-	8.4	9.4	10.7	○
PM-2BC10-R0.30-M10			1.5°		10		5.2°	0.86			2	-	10.4	11.6	13.2	○
PM-2BC10-R0.30-M12					12		4.8°	0.93			2	-	12.4	13.9	15.8	○
PM-2BC10-R0.30-M15			1.5°		15		4.2°	1.03			2	-	15.4	17.2	19.6	○
PM-2BC15-R0.30-M05					5		6.9°	0.74			2	-	-	5.8	6.6	○
PM-2BC15-R0.30-M08					8		5.9°	0.90			2	-	-	9.0	10.2	○
PM-2BC05-R0.40-M08	0.8	0.40	0.5°	0.8	8	1.8	5.5°	0.87	50	4	2	8.3	8.7	9.8	11.1	○
PM-2BC05-R0.40-M12					12		4.5°	0.94	60		2	12.3	13.0	14.5	16.5	○
PM-2BC10-R0.40-M08			1.0°		8		5.6°	0.98	50		2	-	8.4	9.4	10.7	○
PM-2BC10-R0.40-M12					12		4.6°	1.12	60		2	-	12.4	13.9	15.8	○
PM-2BC15-R0.40-M08			1.5°		8		5.8°	1.09	50		2	-	-	9.0	10.2	○
PM-2BC15-R0.40-M12					12		4.8°	1.30	60		2	-	-	13.2	15.0	○

● Stock available ○ Make-to-order

Applicable workpiece material table

Very suitable Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B386-B387

2-flute ball nose end mills with taper neck







Deep ball nose slot

PM-2BC



- High-rigidity taper neck structure.



Degree of workpiece declining

Ordering number	Basic dimension(mm)										Number of teeth Z	Degree of workpiece declining corresponding actually effective neck length				Stock
	D	R	A ₁	H	l ₂	l ₁	A ₂	d ₁	L	d		0.5°	1°	2°	3°	
PM-2BC05-R0.50-M10	1.0	0.50	0.5°	1.0	10	2.5	6.1°	1.08	60	6	2	10.4	10.9	12.2	13.9	○
PM-2BC05-R0.50-M15					15		5.1°	1.16	60		2	15.4	16.2	18.2	20.7	○
PM-2BC05-R0.50-M20					20		4.4°	1.25	70		2	20.4	21.5	24.1	27.4	○
PM-2BC05-R0.50-M25					25		3.8°	1.34	70		2	25.4	26.8	30.0	34.2	○
PM-2BC05-R0.50-M30					30		3.4°	1.42	70		2	30.4	32.0	35.9	41.0	○
PM-2BC10-R0.50-M10			1.0°		10		6.2°	1.21	60		2	-	10.5	11.8	13.4	○
PM-2BC10-R0.50-M15					15		5.2°	1.38	60		2	-	15.5	17.4	19.8	○
PM-2BC10-R0.50-M20					20		4.5°	1.56	70		2	-	20.5	23.0	26.2	○
PM-2BC10-R0.50-M25					25		3.9°	1.73	70		2	-	25.5	28.6	32.6	○
PM-2BC10-R0.50-M30					30		3.5°	1.91	70		2	-	30.5	34.2	39.0	○
PM-2BC10-R0.50-M35			1.5°		35		3.2°	2.08	80		2	-	35.5	39.8	45.4	○
PM-2BC15-R0.50-M10					10		6.3°	1.34	60		2	-	-	11.3	12.8	○
PM-2BC15-R0.50-M15					15		5.3°	1.60	60		2	-	-	16.6	18.9	○
PM-2BC15-R0.50-M20					20		4.6°	1.86	70		2	-	-	21.9	24.9	○
PM-2BC20-R0.50-M15			2°		15		5.4°	1.82	60		2	-	-	15.8	18.0	○
PM-2BC20-R0.50-M20					20		4.7°	2.17	70		2	-	-	20.8	23.7	○
PM-2BC30-R0.50-M20			3°		20		5.0°	2.78	70		2	-	-	-	21.2	○
PM-2BC50-R0.50-M20			5°		20		5.7°	4.01	70		2	-	-	-	-	○
PM-2BC05-R0.60-M12	1.2	0.60	0.5°	1.2	12	2.7	5.6°	1.31	60	6	2	12.4	13.1	14.6	16.6	○
PM-2BC05-R0.60-M24					24		3.8°	1.52	70		2	24.4	25.7	28.8	32.8	○
PM-2BC10-R0.60-M12			1.0°		12		5.7°	1.47	60		2	-	12.5	14.0	15.9	○
PM-2BC10-R0.60-M24					24		3.9°	1.89	70		2	-	24.5	27.5	31.3	○
PM-2BC15-R0.60-M12			1.5°		12		5.8°	1.63	60		2	-	-	13.4	15.2	○
PM-2BC15-R0.60-M24					24		4.1°	2.26	70		2	-	-	26.2	29.8	○

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○	○		○	○			○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B386-B387

B MILLING Solid Carbide End Mills

High-performance general milling PM series







Deep ball nose slot

2-flute ball nose end mills with taper neck

PM-2BC



- High-rigidity taper neck structure.



Degree of workpiece declining

Ordering number	Basic dimension(mm)										Number of teeth Z	Degree of workpiece declining corresponding actually effective neck length				Stock					
	D	R	A ₁	H	l ₂	l ₁	A ₂	d ₁	L	d		0.5°	1°	2°	3°						
PM-2BC05-R0.75-M10	1.5	0.75	0.5°	1.5	10	3	5.9°	1.57	60	6	2	10.4	10.9	12.2	13.8	○					
PM-2BC05-R0.75-M15					15		4.9°	1.65	60		2	15.4	16.2	18.1	20.6	○					
PM-2BC05-R0.75-M30					30		3.2°	1.92	70		2	30.4	32.0	35.9	40.9	○					
PM-2BC10-R0.75-M10			1.0°		10		6.0°	1.69	60		2	-	10.5	11.8	13.3	○					
PM-2BC10-R0.75-M15					15		5.0°	1.86	60		2	-	15.5	17.4	19.7	○					
PM-2BC10-R0.75-M20					20		4.2°	2.04	70		2	-	20.5	23.0	26.1	○					
PM-2BC10-R0.75-M30	1.5	0.75	1.0°	1.5	30	3	3.3°	2.39	70	6	2	-	30.5	34.2	39.0	○					
PM-2BC15-R0.75-M10					10		6.1°	1.81	60		2	-	-	11.3	12.8	○					
PM-2BC15-R0.75-M15			1.5°		15		5.1°	2.07	60		2	-	-	16.6	18.9	○					
PM-2BC15-R0.75-M30					30		3.4°	2.86	70		2	-	-	32.5	37.0	○					
PM-2BC05-R1.0-M20			2.0		1.0		0.5°	2.0	20		4	3.9°	2.18	60	6	2	20.7	21.7	24.3	27.6	○
PM-2BC05-R1.0-M30									30			2.9°	2.36	70		2	30.7	32.3	36.2	non-interference	○
PM-2BC05-R1.0-M40	40	2.4°		2.53		80			2	40.7		42.8	48.0	non-interference		○					
PM-2BC10-R1.0-M20	1.0°			20		4.0°	2.46		60	2		-	20.8	23.3		26.4	○				
PM-2BC10-R1.0-M25				25		3.4°	2.64		60	2		-	25.8	28.9		32.9	○				
PM-2BC10-R1.0-M30				30		3.0°	2.81		70	2		-	30.8	34.5		39.3	○				
PM-2BC10-R1.0-M35				35		2.7°	2.99		80	2		-	35.8	40.1		non-interference	○				
PM-2BC10-R1.0-M40				40		2.5°	3.16		80	2		-	40.8	45.8		non-interference	○				
PM-2BC10-R1.0-M50				50		2.1°	3.51		90	2		-	50.8	57.0		non-interference	○				
PM-2BC15-R1.0-M20	1.5°	20		4		4.1°	2.74		60	2	-	-	22.3	25.3		○					
PM-2BC15-R1.0-M30		30				3.1°	3.27		70	2	-	-	32.9	37.4		○					
PM-2BC15-R1.0-M40		40				2.6°	3.79		80	2	-	-	43.5	non-interference		○					
PM-2BC20-R1.0-M30		2°	30		3.3°	3.72	70		6	2	-	-	31.3	35.5	○						
PM-2BC20-R1.0-M40			40		2.7°	4.42	80			2	-	-	41.3	non-interference	○						
PM-2BC30-R1.0-M30			3°		30	3.5°	4.63			70	2	-	-	-	31.8	○					
PM-2BC30-R1.0-M40	40				2.9°	5.68	80			2	-	-	-	non-interference	○						

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

● Stock available ○ Make-to-order

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B386-B387

2-flute ball nose end mills with taper neck








Deep ball nose slot

PM-2BC



- High-rigidity taper neck structure.



Degree of workpiece declining

Ordering number	Basic dimension(mm)										Number of teeth Z	Degree of workpiece declining corresponding actually effective neck length				Stock
	D	R	A ₁	H	l ₂	l ₁	A ₂	d ₁	L	d		0.5°	1°	2°	3°	
PM-2BC05-R1.5-M30	3.0	1.5	0.5°	3	30	6	2.4°	3.32	70	6	2	30.7	32.3	36.2	non-interference	○
PM-2BC05-R1.5-M40					40		1.9°	3.50	80		2	40.7	42.9	non-interference	non-interference	○
PM-2BC05-R1.5-M50					50		1.6°	3.67	90		2	50.7	53.4	non-interference	non-interference	○
PM-2BC10-R1.5-M30			30		2.5°		3.74	70	2		-	31.0	34.7	non-interference	○	
PM-2BC10-R1.5-M40			40		2.0°		4.09	80	2		-	41.0	45.9	non-interference	○	
PM-2BC10-R1.5-M50			50		1.7°		4.44	90	2		-	51.0	non-interference	non-interference	○	
PM-2BC15-R1.5-M30			30		2.6°		4.16	70	2		-	-	33.1	non-interference	○	
PM-2BC15-R1.5-M40			40		2.1°		4.69	80	2		-	-	43.8	non-interference	○	
PM-2BC15-R1.5-M50	4.0	2.0	1.5°	4	50	7	1.7°	5.21	90	6	2	-	-	non-interference	non-interference	○
PM-2BC05-R2.0-M60					60		1.0°	4.83	110		2	60.8	64.0	non-interference	non-interference	○
PM-2BC10-R2.0-M60					60		1.0°	5.76	110		2	-	61.1	non-interference	non-interference	○

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B386-B387

B MILLING Solid Carbide End Mills

High-performance general milling PM series



2-flute R end mills with straight shank




PM-2R



- Wide applications, applicable for several machining styles.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-2R-D1.0R0.2	1.0	0.2	4	3	50	2	Picture 1	○
PM-2R-D1.5R0.2	1.5	0.2	4	4	50	2	Picture 1	○
PM-2R-D2.0R0.2	2.0	0.2	4	6	50	2	Picture 1	○
PM-2R-D2.0R0.5	2.0	0.5	4	6	50	2	Picture 1	○
PM-2R-D2.5R0.2	2.5	0.2	4	8	50	2	Picture 1	○
PM-2R-D2.5R0.5	2.5	0.5	4	8	50	2	Picture 1	○
PM-2R-D3.0R0.2	3.0	0.2	4	8	50	2	Picture 1	○
PM-2R-D3.0R0.3	3.0	0.3	4	8	50	2	Picture 1	○
PM-2R-D3.0R0.5	3.0	0.5	4	8	50	2	Picture 1	○
PM-2R-D4.0R0.2	4.0	0.2	4	11	50	2	Picture 2	○
PM-2R-D4.0R0.3	4.0	0.3	4	11	50	2	Picture 2	○
PM-2R-D4.0R0.5	4.0	0.5	4	11	50	2	Picture 2	○
PM-2R-D4.0R1.0	4.0	1.0	4	11	50	2	Picture 2	○
PM-2R-D5.0R0.3	5.0	0.3	6	13	50	2	Picture 1	○
PM-2R-D5.0R0.5	5.0	0.5	6	13	50	2	Picture 1	○
PM-2R-D5.0R1.0	5.0	1.0	6	13	50	2	Picture 1	○
PM-2R-D6.0R0.3	6.0	0.3	6	16	50	2	Picture 2	○
PM-2R-D6.0R0.5	6.0	0.5	6	16	50	2	Picture 2	○
PM-2R-D6.0R1.0	6.0	1.0	6	16	50	2	Picture 2	○
PM-2R-D8.0R0.3	8.0	0.3	8	20	60	2	Picture 2	○
PM-2R-D8.0R0.5	8.0	0.5	8	20	60	2	Picture 2	○
PM-2R-D8.0R1.0	8.0	1.0	8	20	60	2	Picture 2	○
PM-2R-D10.0R0.5	10.0	0.5	10	25	75	2	Picture 2	○
PM-2R-D10.0R1.0	10.0	1.0	10	25	75	2	Picture 2	○
PM-2R-D10.0R1.5	10.0	1.5	10	25	75	2	Picture 2	○
PM-2R-D10.0R2.0	10.0	2.0	10	25	75	2	Picture 2	○
PM-2R-D12.0R0.5	12.0	0.5	12	30	75	2	Picture 2	○
PM-2R-D12.0R1.0	12.0	1.0	12	30	75	2	Picture 2	○
PM-2R-D12.0R1.5	12.0	1.5	12	30	75	2	Picture 2	○
PM-2R-D12.0R2.0	12.0	2.0	12	30	75	2	Picture 2	○

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

● Stock available ○ Make-to-order

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B388



4-flute R end mills with straight shank




PM-4R



- Wide applications, applicable for several machining styles.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-4R-D3.0R0.2	3.0	0.2	6	8	50	4	Picture 1	●
PM-4R-D4.0R0.3	4.0	0.3	6	10	50	4	Picture 2	●
PM-4R-D4.0R0.5	4.0	0.5	6	10	50	4	Picture 2	●
PM-4R-D5.0R0.5	5.0	0.5	6	13	50	4	Picture 1	●
PM-4R-D5.0R1.0	5.0	1.0	6	13	50	4	Picture 1	●
PM-4R-D6.0R0.5	6.0	0.5	6	16	50	4	Picture 2	●
PM-4R-D6.0R1.0	6.0	1.0	6	16	50	4	Picture 2	●
PM-4R-D8.0R0.5	8.0	0.5	8	20	60	4	Picture 2	●
PM-4R-D8.0R1.0	8.0	1.0	8	20	60	4	Picture 2	●
PM-4R-D10.0R0.5	10.0	0.5	10	25	75	4	Picture 2	●
PM-4R-D10.0R1.0	10.0	1.0	10	25	75	4	Picture 2	●
PM-4R-D10.0R2.0	10.0	2.0	10	25	75	4	Picture 2	●
PM-4R-D10.0R3.0	10.0	3.0	10	25	75	4	Picture 2	●
PM-4R-D12.0R0.5	12.0	0.5	12	30	75	4	Picture 2	●
PM-4R-D12.0R1.0	12.0	1.0	12	30	75	4	Picture 2	●
PM-4R-D12.0R2.0	12.0	2.0	12	30	75	4	Picture 2	●
PM-4R-D12.0R3.0	12.0	3.0	12	30	75	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B389

B MILLING Solid Carbide End Mills

High-performance general milling PM series



4-flute R end mills with straight shank




PM-4R-H



- Wide applications, applicable for several machining styles.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
PM-4R-D3.0R0.2-H	3.0	0.2	6	8	50	4	Picture 1	●
PM-4R-D4.0R0.3-H	4.0	0.3	6	10	50	4	Picture 1	●
PM-4R-D4.0R0.5-H	4.0	0.5	6	10	50	4	Picture 1	●
PM-4R-D5.0R0.5-H	5.0	0.5	6	13	50	4	Picture 1	●
PM-4R-D5.0R1.0-H	5.0	1.0	6	13	50	4	Picture 1	●
PM-4R-D6.0R0.5-H	6.0	0.5	6	16	50	4	Picture 2	●
PM-4R-D6.0R1.0-H	6.0	1.0	6	16	50	4	Picture 2	●
PM-4R-D8.0R0.5-H	8.0	0.5	8	20	60	4	Picture 2	●
PM-4R-D8.0R1.0-H	8.0	1.0	8	20	60	4	Picture 2	●
PM-4R-D10R0.5-H	10.0	0.5	10	25	75	4	Picture 2	●
PM-4R-D10R1.0-H	10.0	1.0	10	25	75	4	Picture 2	●
PM-4R-D10R2.0-H	10.0	2.0	10	25	75	4	Picture 2	●
PM-4R-D10R3.0-H	10.0	3.0	10	25	75	4	Picture 2	●
PM-4R-D12R0.5-H	12.0	0.5	12	30	75	4	Picture 2	●
PM-4R-D12R1.0-H	12.0	1.0	12	30	75	4	Picture 2	●
PM-4R-D12R2.0-H	12.0	2.0	12	30	75	4	Picture 2	●
PM-4R-D12R3.0-H	12.0	3.0	12	30	75	4	Picture 2	●

● Stock available ○ Make-to-order

➤ Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B389

4-flute R end mills with straight shank, long neck and short cutting edge



Radius shoulder




Profile





Radius corner slot

PM-4RFP

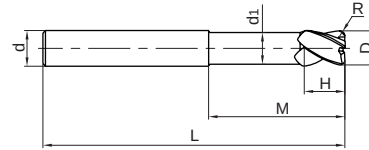

- Long shank and short cutting edge designed for deep cavity milling.



Ordering number	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	d	d ₁	H	M	L		
PM-4RFP-D6.0R0.5	6.0	0.5	6	5.8	6	18	75	4	○
PM-4RFP-D6.0R1.0	6.0	1.0	6	5.8	6	18	75	4	○
PM-4RFP-D8.0R0.5	8.0	0.5	8	7.8	8	24	100	4	○
PM-4RFP-D8.0R1.0	8.0	1.0	8	7.8	8	24	100	4	○
PM-4RFP-D10.0R0.5	10.0	0.5	10	9.6	10	30	100	4	○
PM-4RFP-D10.0R1.0	10.0	1.0	10	9.6	10	30	100	4	○
PM-4RFP-D10.0R2.0	10.0	2.0	10	9.6	10	30	100	4	○
PM-4RFP-D12.0R0.5	12.0	0.5	12	11.5	12	36	100	4	○
PM-4RFP-D12.0R1.0	12.0	1.0	12	11.5	12	36	100	4	○
PM-4RFP-D12.0R2.0	12.0	2.0	12	11.5	12	36	100	4	○
PM-4RFP-D16.0R1.0	16.0	1.0	16	15.5	16	40	150	4	○
PM-4RFP-D16.0R2.0	16.0	2.0	16	15.5	16	40	150	4	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○	○		○	○			○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B389

B MILLING Solid Carbide End Mills

High-performance general milling PM series

4-flute end mills with high feed rate



Radius shoulder



Profile





Radius corner slot


PM-4H



- High-rigidity short cutting edge, suitable for machining with high feed rate.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)							Number of teeth Z	Geometry	Stock
	D	R	d	d ₁	H	M	L			
PM-4H-D3.0R0.8	3.0	0.8	6	2.7	1.2	8	50	4	Picture 1	○
PM-4H-D4.0R1.0	4.0	1.0	6	3.6	1.6	10	50	4	Picture 1	○
PM-4H-D5.0R1.2	5.0	1.2	6	4.5	2	12.5	50	4	Picture 1	○
PM-4H-D6.0R1.0	6.0	1.0	6	5.4	2.5	12	50	4	Picture 2	○
PM-4H-D6.0R1.5	6.0	1.5	6	5.4	2.5	12	50	4	Picture 2	○
PM-4H-D8.0R1.0	8.0	1.0	8	7.0	3.5	16	60	4	Picture 2	○
PM-4H-D8.0R2.0	8.0	2.0	8	7.0	3.5	16	60	4	Picture 2	○
PM-4H-D10.0R1.0	10.0	1.0	10	9.0	4	20	75	4	Picture 2	○
PM-4H-D10.0R2.0	10.0	2.0	10	9.0	4	20	75	4	Picture 2	○
PM-4H-D12.0R2.0	12.0	2.0	12	11.0	5	24	75	4	Picture 2	○
PM-4H-D12.0R3.0	12.0	3.0	12	11.0	5	24	75	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

PM series

➤ Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B390-B391


4-flute end mills with high feed rate




PM-4HL



- PM-4H series with long shank.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)							Number of teeth Z	Geometry	Stock
	D	R	d	d ₁	H	M	L			
PM-4HL-D4.0R1.0	4.0	1.0	6	3.6	1.6	10	75	4	Picture 1	○
PM-4HL-D5.0R1.2	5.0	1.2	6	4.5	2	12.5	75	4	Picture 1	○
PM-4HL-D6.0R1.0	6.0	1.0	6	5.4	2.5	12	75	4	Picture 2	○
PM-4HL-D6.0R1.5	6.0	1.5	6	5.4	2.5	12	75	4	Picture 2	○
PM-4HL-D8.0R1.0	8.0	1.0	8	7.0	3.5	16	100	4	Picture 2	○
PM-4HL-D8.0R2.0	8.0	2.0	8	7.0	3.5	16	100	4	Picture 2	○
PM-4HL-D10.0R1.0	10.0	1.0	10	9.0	4	20	100	4	Picture 2	○
PM-4HL-D10.0R2.0	10.0	2.0	10	9.0	4	20	100	4	Picture 2	○
PM-4HL-D12.0R2.0	12.0	2.0	12	11.0	5	24	100	4	Picture 2	○
PM-4HL-D12.0R3.0	12.0	3.0	12	11.0	5	24	100	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling toolsSolid carbide
end mills

PM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○		○	○			○	○

Code key

B213

Graphics category and identification

B214

Cutting parameters

B390-B391



series general end mills

Wide application

High efficiency machining can be achieved ranging from common steel to pre-hardened steel machining.

Optimized structure

Appropriate combination of sharp cutting edge and tool strength makes cutting easier and faster, extending tool life.


Versatile product series

Suitable for rough machining with high metal removal rate to finish machining with high surface quality.

Complete diameter range

Minimum diameter of 0.3mm for machining of the smallest parts.




Tool type: GM-4E-D10.0
 Dimensions: Ø10.0mm
 Workpiece material: NAK80(40HRC)
 Rotating speed: 3200r/min (100m/min)
 Feed rate: 640mm/min(0.2mm/r)
 Axial cutting depth: $a_p=15\text{mm}$
 Radial cutting depth: $a_e=1.0\text{mm}$
 Cutting style: side milling (down milling)
 Cooling system: air blow
 Machine tool: MIKRON UCP 1000






Cutting edge abrasion and workpiece surface quality

End mill	GM-4E-D10.0	Similar product of company A	Similar product of company B
Cutting length	60m	20m	60m

Cutting edge abrasion



Workpiece surface quality



Multipurpose 3-flute end mills

GM-3E GM-3EL

Excellent vibration resistance, able to achieve various machining operations such as slot milling, side milling, drilling, etc.!

GM-3E-D10.0 slot milling 718H(32HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: 718H(32HRC)

Cutting speed: 80(m/min)

Feed rate per tooth: 0.06(mm/tooth)

Axial cutting depth: 5(mm)

Radial cutting depth: 10(mm)

Cooling system: air blow

Milling style: slot milling



Overhang: 35mm

Failure identification:

(A) Severe breakage occurs with a breakage value above 0.2mm.

(B) Even abrasion value of flank reaches 0.1mm.

Either situation is regarded as tool failure.

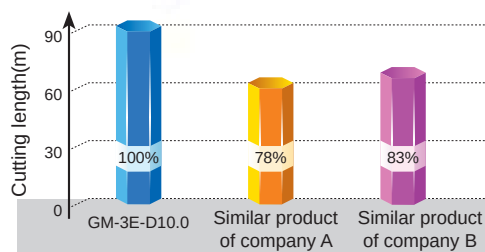

Slot milling cutting length comparison

GM-3E-D10.0 combined machining 718H(32HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: 718H(32HRC)

Cutting speed: 80(m/min)

Feed rate per tooth: 0.06(mm/tooth)

Axial cutting depth: 5(mm)


Radial cutting depth: 10(mm)

Cooling system: air blow

Milling style: combined cutting

Overhang: 35mm

Overhang: 35mm

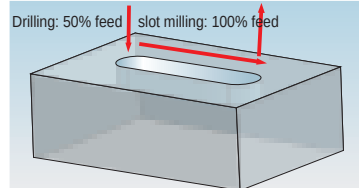

GM-3E-D6.0 side milling NAK80(37HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: NAK80(37HRC)

Cutting speed: 100(m/min)

Feed rate per tooth: 0.06(mm/tooth)



Axial cutting depth: 9(mm)

Radial cutting depth: 0.6(mm)

Cooling system: air blow

Milling style: side milling (down milling)

Overhang: 22mm

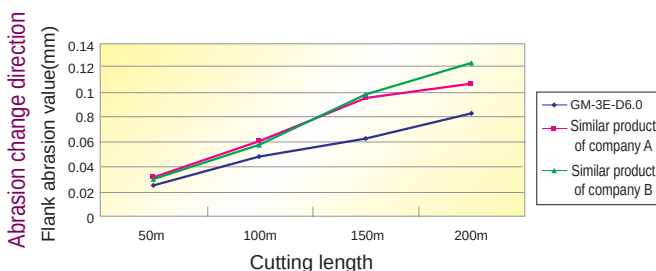

High-efficiency roughing of steel

GM-4W Corrugated edge end mills

Optimized corrugation specially designed for P-type material with proper control of chips size, improving tool life and stability.

Nano coating with excellent lubrication property can reduce vibration as well as resist wear.

Ultra fine cemented carbide substrate with high toughness can easily achieve heavy roughing.

End mills for high-efficiency roughing GM-4W-D8.0 cutting die steel NAK55(33HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: NAK55(33HRC)

Cutting speed: 100(m/min)

Feed rate per tooth: 0.06(mm/tooth)



Axial cutting depth: 12(mm)

Radial cutting depth: 4(mm)

Cooling system: air blow

Milling style: side milling (down milling)


Overhang: 30mm

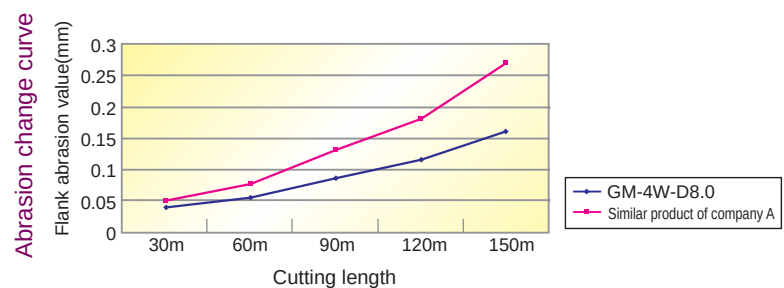

High-precision R end mill series

GM-4R
GM-4RL
GM-2R

High-precision
seamless connection of
nose and peripheral cutting
edge reduces the abrasion at the
juncture and improves tool life.

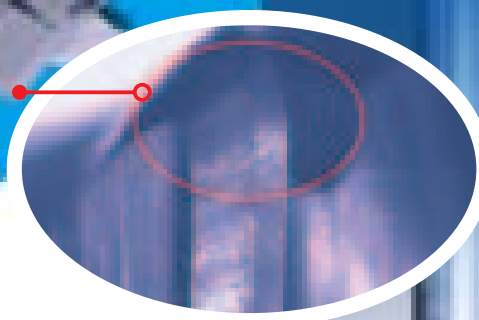

⚙ GM-4R-D6.0R1.0 cavity milling 42CrMo(35HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: 42CrMo(35HRC)

Cutting speed: 100(m/min)

Feed rate per tooth: 0.06(mm/tooth)



Axial cutting depth: 0.3(mm)

Radial cutting depth: 2(mm)

Cooling system: air blow

Milling style: cavity milling

Overhang: 30mm

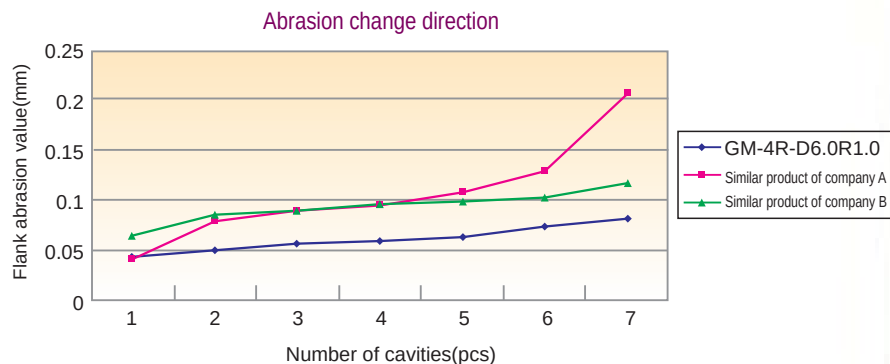



B MILLING Solid Carbide End Mills

GM series for general machining



2-flute flattened end mills with straight shank



GM-2E



- Very suitable for slot milling.
- Wide application.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-2E-D1.0S	1.0	4	3	50	2	Picture 1	●
GM-2E-D1.5S	1.5	4	4	50	2	Picture 1	●
GM-2E-D2.0S	2.0	4	6	50	2	Picture 1	●
GM-2E-D2.5S	2.5	4	8	50	2	Picture 1	●
GM-2E-D3.0S	3.0	4	8	50	2	Picture 1	●
GM-2E-D4.0S	4.0	4	11	50	2	Picture 2	●
GM-2E-D1.0	1.0	6	3	50	2	Picture 1	●
GM-2E-D1.5	1.5	6	4	50	2	Picture 1	●
GM-2E-D2.0	2.0	6	6	50	2	Picture 1	●
GM-2E-D2.5	2.5	6	8	50	2	Picture 1	●
GM-2E-D3.0	3.0	6	8	50	2	Picture 1	●
GM-2E-D3.5	3.5	6	10	50	2	Picture 1	●
GM-2E-D4.0	4.0	6	11	50	2	Picture 1	●
GM-2E-D4.5	4.5	6	11	50	2	Picture 1	●
GM-2E-D5.0	5.0	6	13	50	2	Picture 1	●
GM-2E-D5.5	5.5	6	16	50	2	Picture 1	●
GM-2E-D6.0	6.0	6	16	50	2	Picture 2	●
GM-2E-D7.0	7.0	8	20	60	2	Picture 1	●
GM-2E-D8.0	8.0	8	20	60	2	Picture 2	●
GM-2E-D9.0	9.0	10	22	75	2	Picture 1	●
GM-2E-D10.0	10.0	10	25	75	2	Picture 2	●
GM-2E-D11.0	11.0	12	26	75	2	Picture 1	●
GM-2E-D12.0	12.0	12	30	75	2	Picture 2	●
GM-2E-D14.0	14.0	14	32	75	2	Picture 2	●
GM-2E-D16.0	16.0	16	45	100	2	Picture 2	●
GM-2E-D18.0	18.0	18	45	100	2	Picture 2	●
GM-2E-D20.0	20.0	20	45	100	2	Picture 2	●

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○			○	○			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B392

2-flute flattened end mills with straight shank and long cutting edge



Side face



Step shoulder




Straight slot

GM-2EL



Corner protection





Picture 1



Picture 2

- GM-2E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-2EL-D3.0	3.0	6	12	75	2	Picture 1	●
GM-2EL-D4.0	4.0	6	15	75	2	Picture 1	●
GM-2EL-D5.0	5.0	6	20	75	2	Picture 1	●
GM-2EL-D6.0	6.0	6	20	75	2	Picture 2	●
GM-2EL-D8.0	8.0	8	25	100	2	Picture 2	●
GM-2EL-D10.0	10.0	10	30	100	2	Picture 2	●
GM-2EL-D12.0	12.0	12	35	100	2	Picture 2	●
GM-2EL-D14.0	14.0	14	40	100	2	Picture 2	●
GM-2EL-D16.0	16.0	16	50	150	2	Picture 2	●
GM-2EL-D20.0	20.0	20	55	150	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B392


B MILLING Solid Carbide End Mills

GM series for general machining


3-flute flattened end mills with straight shank



GM-3E





Picture 1



Picture 2

- Excellent vibration resistance, able to achieve various machining operations such as slot milling, side milling, drilling, etc.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-3E-D1.0S	1.0	4	3	50	3	Picture 1	○
GM-3E-D1.5S	1.5	4	4	50	3	Picture 1	○
GM-3E-D2.0S	2.0	4	6	50	3	Picture 1	○
GM-3E-D2.5S	2.5	4	8	50	3	Picture 1	○
GM-3E-D3.0S	3.0	4	8	50	3	Picture 1	○
GM-3E-D4.0S	4.0	4	11	50	3	Picture 2	○
GM-3E-D1.0	1.0	6	3	50	3	Picture 1	○
GM-3E-D1.5	1.5	6	4	50	3	Picture 1	○
GM-3E-D2.0	2.0	6	6	50	3	Picture 1	○
GM-3E-D2.5	2.5	6	8	50	3	Picture 1	○
GM-3E-D3.0	3.0	6	8	50	3	Picture 1	○
GM-3E-D3.5	3.5	6	10	50	3	Picture 1	○
GM-3E-D4.0	4.0	6	11	50	3	Picture 1	○
GM-3E-D4.5	4.5	6	11	50	3	Picture 1	○
GM-3E-D5.0	5.0	6	13	50	3	Picture 1	○
GM-3E-D5.5	5.5	6	16	50	3	Picture 1	○
GM-3E-D6.0	6.0	6	16	50	3	Picture 2	○
GM-3E-D7.0	7.0	8	20	60	3	Picture 1	○
GM-3E-D8.0	8.0	8	20	60	3	Picture 2	○
GM-3E-D9.0	9.0	10	22	75	3	Picture 1	○
GM-3E-D10.0	10.0	10	25	75	3	Picture 2	○
GM-3E-D11.0	11.0	12	26	75	3	Picture 1	○
GM-3E-D12.0	12.0	12	30	75	3	Picture 2	○
GM-3E-D14.0	14.0	14	32	75	3	Picture 2	○
GM-3E-D16.0	16.0	16	45	100	3	Picture 2	○
GM-3E-D18.0	18.0	18	45	100	3	Picture 2	○
GM-3E-D20.0	20.0	20	45	100	3	Picture 2	○

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B393

3-flute flattened end mills with straight shank and long cutting edge



Side face




Step shoulder




Straight slot

GM-3EL

Corner protection





Picture 1



Picture 2

- GM-3E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-3EL-D3.0	3.0	6	12	75	3	Picture 1	○
GM-3EL-D4.0	4.0	6	15	75	3	Picture 1	○
GM-3EL-D5.0	5.0	6	20	75	3	Picture 1	○
GM-3EL-D6.0	6.0	6	20	75	3	Picture 2	○
GM-3EL-D8.0	8.0	8	25	100	3	Picture 2	○
GM-3EL-D10.0	10.0	10	30	100	3	Picture 2	○
GM-3EL-D12.0	12.0	12	35	100	3	Picture 2	○
GM-3EL-D14.0	14.0	14	40	100	3	Picture 2	○
GM-3EL-D16.0	16.0	16	50	150	3	Picture 2	○
GM-3EL-D20.0	20.0	20	55	150	3	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling toolsSolid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B393


B MILLING Solid Carbide End Mills

GM series for general machining


4-flute flattened end mills with straight shank



GM-4E-G





Picture 1



Picture 2

- Very suitable for side milling.
- Wide application.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4E-D1.0S-G	1.0	4	3	50	4	Picture 1	●
GM-4E-D1.5S-G	1.5	4	4	50	4	Picture 1	●
GM-4E-D2.0S-G	2.0	4	6	50	4	Picture 1	●
GM-4E-D2.5S-G	2.5	4	8	50	4	Picture 1	●
GM-4E-D3.0S-G	3.0	4	8	50	4	Picture 1	●
GM-4E-D4.0S-G	4.0	4	11	50	4	Picture 2	●
GM-4E-D1.0-G	1.0	6	3	50	4	Picture 1	●
GM-4E-D1.5-G	1.5	6	4	50	4	Picture 1	●
GM-4E-D2.0-G	2.0	6	6	50	4	Picture 1	●
GM-4E-D2.5-G	2.5	6	8	50	4	Picture 1	●
GM-4E-D3.0-G	3.0	6	8	50	4	Picture 1	●
GM-4E-D3.5-G	3.5	6	10	50	4	Picture 1	●
GM-4E-D4.0-G	4.0	6	11	50	4	Picture 1	●
GM-4E-D4.5-G	4.5	6	11	50	4	Picture 1	●
GM-4E-D5.0-G	5.0	6	13	50	4	Picture 1	●
GM-4E-D5.5-G	5.5	6	16	50	4	Picture 1	●
GM-4E-D6.0-G	6.0	6	16	50	4	Picture 2	●
GM-4E-D7.0-G	7.0	8	20	60	4	Picture 1	●
GM-4E-D8.0-G	8.0	8	20	60	4	Picture 2	●
GM-4E-D9.0-G	9.0	10	22	75	4	Picture 1	●
GM-4E-D10.0-G	10.0	10	25	75	4	Picture 2	●
GM-4E-D11.0-G	11.0	12	26	75	4	Picture 1	●
GM-4E-D12.0-G	12.0	12	30	75	4	Picture 2	●
GM-4E-D14.0-G	14.0	14	32	75	4	Picture 2	●
GM-4E-D16.0-G	16.0	16	45	100	4	Picture 2	●
GM-4E-D18.0-G	18.0	18	45	100	4	Picture 2	●
GM-4E-D20.0-G	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214



Cutting parameters

B394



4-flute flattened end mills with straight shank and long cutting edge



GM-4EL-G



- GM-4E-G series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4EL-D3.0-G	3.0	6	12	75	4	Picture 1	○
GM-4EL-D4.0-G	4.0	6	15	75	4	Picture 1	○
GM-4EL-D5.0-G	5.0	6	20	75	4	Picture 1	○
GM-4EL-D6.0-G	6.0	6	20	75	4	Picture 2	○
GM-4EL-D8.0-G	8.0	8	25	100	4	Picture 2	○
GM-4EL-D10.0-G	10.0	10	30	100	4	Picture 2	○
GM-4EL-D12.0-G	12.0	12	35	100	4	Picture 2	○
GM-4EL-D14.0-G	14.0	14	40	100	4	Picture 2	○
GM-4EL-D16.0-G	16.0	16	50	150	4	Picture 2	○
GM-4EL-D20.0-G	20.0	20	55	150	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
⊙	⊙	⊙	○			○	⊙				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B394


B MILLING Solid Carbide End Mills

GM series for general machining


4-flute flattened end mills with straight shank




GM-4E



Corner protection





Picture 1



Picture 2

- Very suitable for side milling and shallow slot machining.
- Wide application.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4E-D1.0S	1.0	4	3	50	4	Picture 1	●
GM-4E-D1.5S	1.5	4	4	50	4	Picture 1	●
GM-4E-D2.0S	2.0	4	6	50	4	Picture 1	●
GM-4E-D2.5S	2.5	4	8	50	4	Picture 1	●
GM-4E-D3.0S	3.0	4	8	50	4	Picture 1	●
GM-4E-D4.0S	4.0	4	11	50	4	Picture 2	●
GM-4E-D1.0	1.0	6	3	50	4	Picture 1	●
GM-4E-D1.5	1.5	6	4	50	4	Picture 1	●
GM-4E-D2.0	2.0	6	6	50	4	Picture 1	●
GM-4E-D2.5	2.5	6	8	50	4	Picture 1	●
GM-4E-D3.0	3.0	6	8	50	4	Picture 1	●
GM-4E-D3.5	3.5	6	10	50	4	Picture 1	●
GM-4E-D4.0	4.0	6	11	50	4	Picture 1	●
GM-4E-D4.5	4.5	6	11	50	4	Picture 1	●
GM-4E-D5.0	5.0	6	13	50	4	Picture 1	●
GM-4E-D5.5	5.5	6	16	50	4	Picture 1	●
GM-4E-D6.0	6.0	6	16	50	4	Picture 2	●
GM-4E-D7.0	7.0	8	20	60	4	Picture 1	●
GM-4E-D8.0	8.0	8	20	60	4	Picture 2	●
GM-4E-D9.0	9.0	10	22	75	4	Picture 1	●
GM-4E-D10.0	10.0	10	25	75	4	Picture 2	●
GM-4E-D11.0	11.0	12	26	75	4	Picture 1	●
GM-4E-D12.0	12.0	12	30	75	4	Picture 2	●
GM-4E-D14.0	14.0	14	32	75	4	Picture 2	●
GM-4E-D16.0	16.0	16	45	100	4	Picture 2	●
GM-4E-D18.0	18.0	18	45	100	4	Picture 2	●
GM-4E-D20.0	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214




Cutting parameters

B395



4-flute flattened end mills with straight shank and long cutting edge



GM-4EL

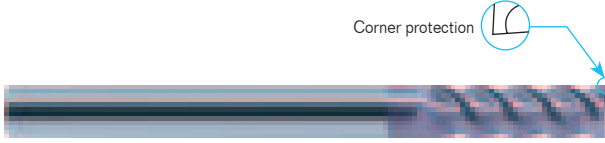

- GM-4E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4EL-D3.0	3.0	6	12	75	4	Picture 1	●
GM-4EL-D4.0	4.0	6	15	75	4	Picture 1	●
GM-4EL-D5.0	5.0	6	20	75	4	Picture 1	●
GM-4EL-D6.0	6.0	6	20	75	4	Picture 2	●
GM-4EL-D8.0	8.0	8	25	100	4	Picture 2	●
GM-4EL-D10.0	10.0	10	30	100	4	Picture 2	●
GM-4EL-D12.0	12.0	12	35	100	4	Picture 2	●
GM-4EL-D14.0	14.0	14	40	100	4	Picture 2	●
GM-4EL-D16.0	16.0	16	50	150	4	Picture 2	●
GM-4EL-D20.0	20.0	20	55	150	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table

Very suitable Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B395

B MILLING Solid Carbide End Mills

GM series for general machining

6-flute flattened end mills with straight shank



Side face




Step shoulder





Straight slot

GM-6E



- Perfect rigidity, very suitable for side finish machining.
- High speed, high feed rate machining applicable.



Ordering number	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-6E-D6.0	6.0	6	18	60	6	●
GM-6E-D8.0	8.0	8	20	60	6	●
GM-6E-D10.0	10.0	10	30	75	6	●
GM-6E-D12.0	12.0	12	32	75	6	●
GM-6E-D16.0	16.0	16	40	100	6	●
GM-6E-D20.0	20.0	20	45	100	6	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
●	●	●	○			○	●			

Code key

B213

Graphics category and identification

B214


Cutting parameters

B396


6-flute flattened end mills with straight shank and long cutting edge



GM-6EL



- GM-6E series with long cutting edge.



Ordering number	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-6EL-D6.0	6.0	6	24	75	6	●
GM-6EL-D8.0	8.0	8	32	75	6	●
GM-6EL-D10.0	10.0	10	40	100	6	●
GM-6EL-D12.0	12.0	12	45	100	6	●
GM-6EL-D16.0	16.0	16	64	150	6	●
GM-6EL-D20.0	20.0	20	75	150	6	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
⊙	⊙	⊙	○			○	⊙				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B397

B MILLING Solid Carbide End Mills


GM series for general machining

2-flute flattened end mills with straight shank, long neck and short cutting edge




Deep flattened slot

GM-2EP



● Suitable for narrow slot milling or milling of fine parts that could generate interference.



Ordering number	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d1	L		
GM-2EP-D0.5-M04	0.5	4	0.7	4	0.45	50	2	●
GM-2EP-D0.5-M06	0.5	4	0.7	6	0.45	50	2	●
GM-2EP-D0.5-M08	0.5	4	0.7	8	0.45	50	2	●
GM-2EP-D0.8-M04	0.8	4	1.2	4	0.75	50	2	●
GM-2EP-D0.8-M06	0.8	4	1.2	6	0.75	50	2	●
GM-2EP-D0.8-M08	0.8	4	1.2	8	0.75	50	2	●
GM-2EP-D0.8-M10	0.8	4	1.2	10	0.75	50	2	●
GM-2EP-D1.0-M04	1.0	4	1.5	4	0.95	50	2	●
GM-2EP-D1.0-M06	1.0	4	1.5	6	0.95	50	2	●
GM-2EP-D1.0-M08	1.0	4	1.5	8	0.95	50	2	●
GM-2EP-D1.0-M10	1.0	4	1.5	10	0.95	50	2	●
GM-2EP-D1.0-M12	1.0	4	1.5	12	0.95	50	2	●
GM-2EP-D1.0-M14	1.0	4	1.5	14	0.95	50	2	●
GM-2EP-D1.2-M06	1.2	4	1.8	6	1.15	50	2	●
GM-2EP-D1.2-M08	1.2	4	1.8	8	1.15	50	2	●
GM-2EP-D1.2-M10	1.2	4	1.8	10	1.15	50	2	●
GM-2EP-D1.2-M12	1.2	4	1.8	12	1.15	50	2	●
GM-2EP-D1.5-M06	1.5	4	2.3	6	1.45	50	2	●
GM-2EP-D1.5-M08	1.5	4	2.3	8	1.45	50	2	●
GM-2EP-D1.5-M10	1.5	4	2.3	10	1.45	50	2	●
GM-2EP-D1.5-M12	1.5	4	2.3	12	1.45	50	2	●
GM-2EP-D1.5-M14	1.5	4	2.3	14	1.45	50	2	●
GM-2EP-D2.0-M06	2.0	4	3.0	6	1.95	50	2	●
GM-2EP-D2.0-M08	2.0	4	3.0	8	1.95	50	2	●
GM-2EP-D2.0-M10	2.0	4	3.0	10	1.95	50	2	●
GM-2EP-D2.0-M12	2.0	4	3.0	12	1.95	50	2	●

● Stock available ○ Make-to-order

➤ Applicable workpiece material ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters


B398-B399

2-flute flattened end mills with straight shank, long neck and short cutting edge





Deep flattened slot

GM-2EP



- Suitable for narrow slot milling or milling of fine parts that could generate interference.



Ordering number	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d1	L		
GM-2EP-D2.0-M14	2.0	4	3.0	14	1.95	50	2	●
GM-2EP-D2.0-M16	2.0	4	3.0	16	1.95	50	2	●
GM-2EP-D2.5-M08	2.5	4	3.7	8	2.4	50	2	●
GM-2EP-D2.5-M10	2.5	4	3.7	10	2.4	50	2	●
GM-2EP-D2.5-M12	2.5	4	3.7	12	2.4	50	2	●
GM-2EP-D2.5-M14	2.5	4	3.7	14	2.4	50	2	●
GM-2EP-D2.5-M16	2.5	4	3.7	16	2.4	60	2	●
GM-2EP-D2.5-M18	2.5	4	3.7	18	2.4	60	2	●
GM-2EP-D2.5-M20	2.5	4	3.7	20	2.4	60	2	●
GM-2EP-D3.0-M06	3.0	6	4.5	6	2.85	50	2	●
GM-2EP-D3.0-M08	3.0	6	4.5	8	2.85	50	2	●
GM-2EP-D3.0-M10	3.0	6	4.5	10	2.85	50	2	●
GM-2EP-D3.0-M12	3.0	6	4.5	12	2.85	50	2	●
GM-2EP-D3.0-M14	3.0	6	4.5	14	2.85	60	2	●
GM-2EP-D3.0-M16	3.0	6	4.5	16	2.85	60	2	●
GM-2EP-D3.0-M18	3.0	6	4.5	18	2.85	60	2	●
GM-2EP-D3.0-M20	3.0	6	4.5	20	2.85	60	2	●
GM-2EP-D4.0-M12	4.0	6	6.0	12	3.85	50	2	●
GM-2EP-D4.0-M16	4.0	6	6.0	16	3.85	60	2	●
GM-2EP-D4.0-M20	4.0	6	6.0	20	3.85	60	2	●
GM-2EP-D4.0-M25	4.0	6	6.0	25	3.85	60	2	●
GM-2EP-D5.0-M16	5.0	6	7.5	16	4.85	60	2	●
GM-2EP-D5.0-M25	5.0	6	7.5	25	4.85	70	2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○			○	○			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B398-B399

B MILLING Solid Carbide End Mills

GM series for general machining



2-flute flattened end mills with straight shank and tiny diameter



GM-2ES



Tiny diameter end mills can fully display high speed and high precision performances of machining center, often used for machining of precision components such as electronic part etc.



Ordering number	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-2ES-D0.3	0.3	4	0.6	50	2	●
GM-2ES-D0.4	0.4	4	0.8	50	2	●
GM-2ES-D0.5	0.5	4	1.0	50	2	●
GM-2ES-D0.6	0.6	4	1.2	50	2	●
GM-2ES-D0.7	0.7	4	1.4	50	2	●
GM-2ES-D0.8	0.8	4	1.6	50	2	●
GM-2ES-D0.9	0.9	4	1.8	50	2	●
GM-2ES-D1.0	1.0	4	2.0	50	2	●
GM-2ES-D1.1	1.1	4	2.0	50	2	●
GM-2ES-D1.2	1.2	4	2.5	50	2	●
GM-2ES-D1.3	1.3	4	2.5	50	2	●
GM-2ES-D1.4	1.4	4	3.0	50	2	●
GM-2ES-D1.5	1.5	4	3.0	50	2	●
GM-2ES-D1.6	1.6	4	3.5	50	2	●
GM-2ES-D1.7	1.7	4	3.5	50	2	●
GM-2ES-D1.8	1.8	4	4.0	50	2	●
GM-2ES-D1.9	1.9	4	4.0	50	2	●
GM-2ES-D2.0	2.0	4	4.0	50	2	●
GM-2ES-D2.1	2.1	4	4.0	50	2	●
GM-2ES-D2.2	2.2	4	4.5	50	2	●
GM-2ES-D2.3	2.3	4	4.5	50	2	●
GM-2ES-D2.4	2.4	4	5.0	50	2	●
GM-2ES-D2.5	2.5	4	5.0	50	2	●
GM-2ES-D2.6	2.6	4	5.0	50	2	●
GM-2ES-D2.7	2.7	4	5.5	50	2	●
GM-2ES-D2.8	2.8	4	5.5	50	2	●
GM-2ES-D2.9	2.9	4	6.0	50	2	●
GM-2ES-D3.0	3.0	4	6.0	50	2	●

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B213


Graphics category and identification B214

Cutting parameters B400


2-flute ball nose end mills with straight shank



GM-2B



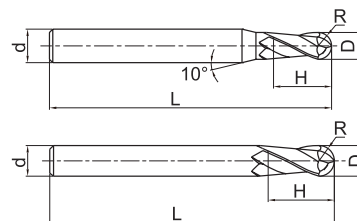


Picture 1



Picture 2

- For profile milling, high speed machining applicable.
- Wide application.



Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2B-R0.5S	1.0	0.5	4	2	50	2	Picture 1	●
GM-2B-R0.75S	1.5	0.75	4	3	50	2	Picture 1	●
GM-2B-R1.0S	2.0	1.0	4	4	50	2	Picture 1	●
GM-2B-R1.25S	2.5	1.25	4	5	50	2	Picture 1	●
GM-2B-R1.5S	3.0	1.5	4	6	50	2	Picture 1	●
GM-2B-R2.0S	4.0	2.0	4	8	50	2	Picture 2	●
GM-2B-R0.5	1.0	0.5	6	2	50	2	Picture 1	●
GM-2B-R0.75	1.5	0.75	6	3	50	2	Picture 1	●
GM-2B-R1.0	2.0	1.0	6	4	50	2	Picture 1	●
GM-2B-R1.25	2.5	1.25	6	5	50	2	Picture 1	●
GM-2B-R1.5	3.0	1.5	6	6	50	2	Picture 1	●
GM-2B-R1.75	3.5	1.75	6	8	50	2	Picture 1	●
GM-2B-R2.0	4.0	2.0	6	8	50	2	Picture 1	●
GM-2B-R2.5	5.0	2.5	6	10	50	2	Picture 1	●
GM-2B-R2.75	5.5	2.75	6	12	50	2	Picture 1	●
GM-2B-R3.0	6.0	3.0	6	12	50	2	Picture 2	●
GM-2B-R3.5	7.0	3.5	8	14	60	2	Picture 1	●
GM-2B-R4.0	8.0	4.0	8	16	60	2	Picture 2	●
GM-2B-R4.5	9.0	4.5	10	18	75	2	Picture 1	●
GM-2B-R5.0	10	5.0	10	20	75	2	Picture 2	●
GM-2B-R6.0	12	6.0	12	24	75	2	Picture 2	●
GM-2B-R7.0	14	7.0	14	28	75	2	Picture 2	●
GM-2B-R8.0	16	8.0	16	32	100	2	Picture 2	●
GM-2B-R10.0	20	10.0	20	40	100	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable
milling toolsSolid carbide
end mills

GM series

➤ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B401


B MILLING Solid Carbide End Mills

GM series for general machining




2-flute ball nose end mills with straight shank



GM-2BL

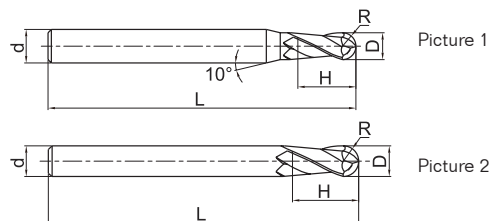

- GM-2B series with long shank.



Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2BL-R1.0	2.0	1.0	6	4	75	2	Picture 1	●
GM-2BL-R1.25	2.5	1.25	6	5	75	2	Picture 1	●
GM-2BL-R1.5	3.0	1.5	6	6	75	2	Picture 1	●
GM-2BL-R1.75	3.5	1.75	6	8	75	2	Picture 1	●
GM-2BL-R2.0	4.0	2.0	6	8	75	2	Picture 1	●
GM-2BL-R2.5	5.0	2.5	6	10	75	2	Picture 1	●
GM-2BL-R2.75	5.5	2.75	6	12	75	2	Picture 1	●
GM-2BL-R3.0	6.0	3.0	6	12	75	2	Picture 2	●
GM-2BL-R3.5	7.0	3.5	8	14	75	2	Picture 1	●
GM-2BL-R4.0	8.0	4.0	8	16	100	2	Picture 2	●
GM-2BL-R4.5	9.0	4.5	10	18	100	2	Picture 1	●
GM-2BL-R5.0	10.0	5.0	10	20	100	2	Picture 2	●
GM-2BL-R6.0	12.0	6.0	12	24	100	2	Picture 2	●
GM-2BL-R7.0	14.0	7.0	14	28	100	2	Picture 2	●
GM-2BL-R8.0	16.0	8.0	16	32	150	2	Picture 2	●
GM-2BL-R10.0	20.0	10.0	20	40	150	2	Picture 2	●

● Stock available ○ Make-to-order

Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
●	●	●	○			○	●			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B401


4-flute ball nose end mills with straight shank




GM-4B



- 4-flute ball nose end mill can operate with higher feed speed and machining efficiency, extending too life in machining high-hardness workpiece.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4B-R1.5	3.0	1.5	6	6	50	4	Picture 1	●
GM-4B-R2.0	4.0	2.0	6	8	50	4	Picture 1	●
GM-4B-R2.5	5.0	2.5	6	10	50	4	Picture 1	●
GM-4B-R3.0	6.0	3.0	6	12	50	4	Picture 2	●
GM-4B-R4.0	8.0	4.0	8	16	60	4	Picture 2	●
GM-4B-R5.0	10.0	5.0	10	20	75	4	Picture 2	●
GM-4B-R6.0	12.0	6.0	12	24	75	4	Picture 2	●
GM-4B-R7.0	14.0	7.0	14	28	75	4	Picture 2	●
GM-4B-R8.0	16.0	8.0	16	32	100	4	Picture 2	●
GM-4B-R9.0	18.0	9.0	18	36	100	4	Picture 2	●
GM-4B-R10.0	20.0	10.0	20	40	100	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B402


B MILLING Solid Carbide End Mills

GM series for general machining


4-flute ball nose end mills with straight and long shank



GM-4BL






Picture 1



Picture 2

- GM-4B series with long shank.



Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4BL-R1.5	3.0	1.5	6	6	75	4	Picture 1	○
GM-4BL-R2.0	4.0	2.0	6	8	75	4	Picture 1	○
GM-4BL-R2.5	5.0	2.5	6	10	75	4	Picture 1	○
GM-4BL-R3.0	6.0	3.0	6	12	75	4	Picture 2	○
GM-4BL-R4.0	8.0	4.0	8	16	100	4	Picture 2	○
GM-4BL-R5.0	10.0	5.0	10	20	100	4	Picture 2	○
GM-4BL-R6.0	12.0	6.0	12	24	100	4	Picture 2	○
GM-4BL-R7.0	14.0	7.0	14	28	100	4	Picture 2	○
GM-4BL-R8.0	16.0	8.0	16	32	150	4	Picture 2	○
GM-4BL-R9.0	18.0	9.0	18	36	150	4	Picture 2	○
GM-4BL-R10.0	20.0	10.0	20	40	150	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214


Cutting parameters

B402



2-flute tiny ball nose end mills with straight shank



GM-2BS



● Tiny diameter end mills can fully display high speed and high precision performances of machining center, often used for machining of precision components such as electronic part etc.



Ordering number	Basic dimension(mm)					Number of teeth Z	Stock
	D	R	d	H	L		
GM-2BS-R0.15	0.30	0.15	4	0.5	50	2	●
GM-2BS-R0.20	0.40	0.20	4	0.6	50	2	●
GM-2BS-R0.25	0.50	0.25	4	0.8	50	2	●
GM-2BS-R0.30	0.60	0.30	4	0.9	50	2	●
GM-2BS-R0.35	0.70	0.35	4	1.0	50	2	●
GM-2BS-R0.40	0.80	0.40	4	1.2	50	2	●
GM-2BS-R0.45	0.90	0.45	4	1.3	50	2	●
GM-2BS-R0.50	1.00	0.50	4	1.5	50	2	●
GM-2BS-R0.60	1.20	0.60	4	1.8	50	2	●
GM-2BS-R0.70	1.40	0.70	4	2.0	50	2	●
GM-2BS-R0.75	1.50	0.75	4	2.3	50	2	●
GM-2BS-R0.80	1.60	0.80	4	2.5	50	2	●
GM-2BS-R0.90	1.80	0.90	4	2.7	50	2	●
GM-2BS-R1.00	2.00	1.00	4	3.0	50	2	●
GM-2BS-R1.25	2.50	1.25	4	3.7	50	2	●
GM-2BS-R1.50	3.00	1.50	4	4.5	50	2	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

➤ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B403

B MILLING Solid Carbide End Mills


GM series for general machining

2-flute ball nose end mills with straight shank, long neck and short cutting edge





Deep ball nose slot

GM-2BP



- Suitable for machining narrow slot and free-form surface.



Ordering number	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	H	d ₁	M	d	L		
GM-2BP-R0.25-M04	0.5	0.25	0.7	0.45	4	4	50	2	●
GM-2BP-R0.25-M06	0.5	0.25	0.7	0.45	6	4	50	2	●
GM-2BP-R0.3-M04	0.6	0.3	0.9	0.55	4	4	50	2	●
GM-2BP-R0.3-M06	0.6	0.3	0.9	0.55	6	4	50	2	●
GM-2BP-R0.3-M08	0.6	0.3	0.9	0.55	8	4	50	2	●
GM-2BP-R0.4-M04	0.8	0.4	1.2	0.75	4	4	50	2	●
GM-2BP-R0.4-M06	0.8	0.4	1.2	0.75	6	4	50	2	●
GM-2BP-R0.4-M08	0.8	0.4	1.2	0.75	8	4	50	2	●
GM-2BP-R0.4-M10	0.8	0.4	1.2	0.75	10	4	50	2	●
GM-2BP-R0.5-M04	1.0	0.5	1.5	0.95	4	4	50	2	●
GM-2BP-R0.5-M06	1.0	0.5	1.5	0.95	6	4	50	2	●
GM-2BP-R0.5-M08	1.0	0.5	1.5	0.95	8	4	50	2	●
GM-2BP-R0.5-M10	1.0	0.5	1.5	0.95	10	4	50	2	●
GM-2BP-R0.5-M12	1.0	0.5	1.5	0.95	12	4	50	2	●
GM-2BP-R0.6-M06	1.2	0.6	1.8	1.15	6	4	50	2	●
GM-2BP-R0.6-M08	1.2	0.6	1.8	1.15	8	4	50	2	●
GM-2BP-R0.6-M12	1.2	0.6	1.8	1.15	12	4	50	2	●
GM-2BP-R0.6-M16	1.2	0.6	1.8	1.15	16	4	50	2	●
GM-2BP-R0.75-M08	1.5	0.75	2.3	1.45	8	4	50	2	●
GM-2BP-R0.75-M12	1.5	0.75	2.3	1.45	12	4	50	2	●
GM-2BP-R0.75-M16	1.5	0.75	2.3	1.45	16	4	50	2	●
GM-2BP-R1.0-M06	2.0	1.0	3.0	1.95	6	4	50	2	●
GM-2BP-R1.0-M08	2.0	1.0	3.0	1.95	8	4	50	2	●
GM-2BP-R1.0-M10	2.0	1.0	3.0	1.95	10	4	50	2	●

● Stock available ○ Make-to-order

Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters


B404-B405

2-flute ball nose end mills with straight shank, long neck and short cutting edge





Deep ball nose slot

GM-2BP



- Suitable for machining narrow slot and free-form surface.



Ordering number	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	H	d ₁	M	d	L		
GM-2BP-R1.0-M12	2.0	1.0	3.0	1.95	12	4	50	2	●
GM-2BP-R1.0-M16	2.0	1.0	3.0	1.95	16	4	50	2	●
GM-2BP-R1.0-M20	2.0	1.0	3.0	1.95	20	4	50	2	●
GM-2BP-R1.25-M08	2.5	1.25	3.7	2.4	8	4	50	2	●
GM-2BP-R1.25-M12	2.5	1.25	3.7	2.4	12	4	50	2	●
GM-2BP-R1.25-M16	2.5	1.25	3.7	2.4	16	4	60	2	●
GM-2BP-R1.25-M20	2.5	1.25	3.7	2.4	20	4	60	2	●
GM-2BP-R1.5-M08	3.0	1.5	4.5	2.85	8	6	50	2	●
GM-2BP-R1.5-M10	3.0	1.5	4.5	2.85	10	6	50	2	●
GM-2BP-R1.5-M12	3.0	1.5	4.5	2.85	12	6	50	2	●
GM-2BP-R1.5-M16	3.0	1.5	4.5	2.85	16	6	60	2	●
GM-2BP-R1.5-M20	3.0	1.5	4.5	2.85	20	6	60	2	●
GM-2BP-R2.0-M10	4.0	2.0	6.0	3.85	10	6	60	2	●
GM-2BP-R2.0-M16	4.0	2.0	6.0	3.85	16	6	60	2	●
GM-2BP-R2.0-M20	4.0	2.0	6.0	3.85	20	6	60	2	●
GM-2BP-R2.0-M25	4.0	2.0	6.0	3.85	25	6	60	2	●
GM-2BP-R2.5-M16	5.0	2.5	7.5	4.85	16	6	60	2	●
GM-2BP-R2.5-M25	5.0	2.5	7.5	4.85	25	6	70	2	●

● Stock available ○ Make-to-order

Indexable
milling toolsSolid carbide
end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B404-B405

B MILLING Solid Carbide End Mills

GM series for general machining



2-flute R end mills with straight shank




GM-2R



- Wide applications, applicable for several machining styles.



Picture 1



Picture 2

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2R-D1.0R0.2	1.0	0.2	4	3	50	2	Picture 1	●
GM-2R-D1.5R0.2	1.5	0.2	4	4	50	2	Picture 1	●
GM-2R-D2.0R0.2	2.0	0.2	4	6	50	2	Picture 1	●
GM-2R-D2.0R0.5	2.0	0.5	4	6	50	2	Picture 1	●
GM-2R-D2.5R0.2	2.5	0.2	4	8	50	2	Picture 1	●
GM-2R-D2.5R0.5	2.5	0.5	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.2	3.0	0.2	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.3	3.0	0.3	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.5	3.0	0.5	4	8	50	2	Picture 1	●
GM-2R-D4.0R0.2	4.0	0.2	4	11	50	2	Picture 2	●
GM-2R-D4.0R0.3	4.0	0.3	4	11	50	2	Picture 2	●
GM-2R-D4.0R0.5	4.0	0.5	4	11	50	2	Picture 2	●
GM-2R-D4.0R1.0	4.0	1.0	4	11	50	2	Picture 2	●
GM-2R-D5.0R0.3	5.0	0.3	6	13	50	2	Picture 1	●
GM-2R-D5.0R0.5	5.0	0.5	6	13	50	2	Picture 1	●
GM-2R-D5.0R1.0	5.0	1.0	6	13	50	2	Picture 1	●
GM-2R-D6.0R0.3	6.0	0.3	6	16	50	2	Picture 2	●
GM-2R-D6.0R0.5	6.0	0.5	6	16	50	2	Picture 2	●
GM-2R-D6.0R1.0	6.0	1.0	6	16	50	2	Picture 2	●
GM-2R-D8.0R0.3	8.0	0.3	8	20	60	2	Picture 2	●
GM-2R-D8.0R0.5	8.0	0.5	8	20	60	2	Picture 2	●
GM-2R-D8.0R1.0	8.0	1.0	8	20	60	2	Picture 2	●
GM-2R-D10.0R0.5	10.0	0.5	10	25	75	2	Picture 2	●
GM-2R-D10.0R1.0	10.0	1.0	10	25	75	2	Picture 2	●
GM-2R-D10.0R1.5	10.0	1.5	10	25	75	2	Picture 2	●
GM-2R-D10.0R2.0	10.0	2.0	10	25	75	2	Picture 2	●
GM-2R-D12.0R0.5	12.0	0.5	12	30	75	2	Picture 2	●
GM-2R-D12.0R1.0	12.0	1.0	12	30	75	2	Picture 2	●
GM-2R-D12.0R1.5	12.0	1.5	12	30	75	2	Picture 2	●
GM-2R-D12.0R2.0	12.0	2.0	12	30	75	2	Picture 2	●

● Stock available ○ Make-to-order

Applicable workpiece material table

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○			○	○			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B406

4-flute R end mills with straight shank



Radius shoulder



Profile





Radius corner slot

GM-4R



- Wide applications, applicable for several machining styles.

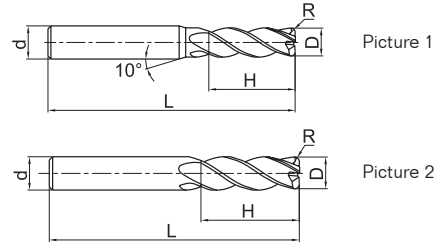

Ordering number	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4R-D3.0R0.2	3.0	0.2	4	8	50	4	Picture 1	●
GM-4R-D4.0R0.3	4.0	0.3	4	10	50	4	Picture 2	●
GM-4R-D4.0R0.5	4.0	0.5	4	10	50	4	Picture 2	●
GM-4R-D5.0R0.5	5.0	0.5	6	13	50	4	Picture 1	●
GM-4R-D5.0R1.0	5.0	1.0	6	13	50	4	Picture 1	●
GM-4R-D6.0R0.5	6.0	0.5	6	16	50	4	Picture 2	●
GM-4R-D6.0R1.0	6.0	1.0	6	16	50	4	Picture 2	●
GM-4R-D8.0R0.5	8.0	0.5	8	20	60	4	Picture 2	●
GM-4R-D8.0R1.0	8.0	1.0	8	20	60	4	Picture 2	●
GM-4R-D10.0R0.5	10.0	0.5	10	25	75	4	Picture 2	●
GM-4R-D10.0R1.0	10.0	1.0	10	25	75	4	Picture 2	●
GM-4R-D10.0R2.0	10.0	2.0	10	25	75	4	Picture 2	●
GM-4R-D10.0R3.0	10.0	3.0	10	25	75	4	Picture 2	●
GM-4R-D12.0R0.5	12.0	0.5	12	30	75	4	Picture 2	●
GM-4R-D12.0R1.0	12.0	1.0	12	30	75	4	Picture 2	●
GM-4R-D12.0R2.0	12.0	2.0	12	30	75	4	Picture 2	●
GM-4R-D12.0R3.0	12.0	3.0	12	30	75	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

➤ Applicable workpiece material table ○ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○			○	○				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B407


B MILLING Solid Carbide End Mills

GM series for general machining


4-flute R end mills with straight and long shank



GM-4RL



● GM-4R series with long shank.



Ordering number	Basic dimension(mm)					Number of teeth Z	Stock
	D	R	d	H	L		
GM-4RL-D6.0R0.5	6.0	0.5	6	16	75	4	●
GM-4RL-D6.0R1.0	6.0	1.0	6	16	75	4	●
GM-4RL-D8.0R0.5	8.0	0.5	8	20	100	4	●
GM-4RL-D8.0R1.0	8.0	1.0	8	20	100	4	●
GM-4RL-D10.0R0.5	10.0	0.5	10	25	100	4	●
GM-4RL-D10.0R1.0	10.0	1.0	10	25	100	4	●
GM-4RL-D10.0R2.0	10.0	2.0	10	25	100	4	●
GM-4RL-D12.0R0.5	12.0	0.5	12	30	100	4	●
GM-4RL-D12.0R1.0	12.0	1.0	12	30	100	4	●
GM-4RL-D12.0R2.0	12.0	2.0	12	30	100	4	●
GM-4RL-D16.0R1.0	16.0	1.0	16	45	150	4	●
GM-4RL-D16.0R2.0	16.0	2.0	16	45	150	4	●

● Stock available ○ Make-to-order

Indexable
milling tools

Solid carbide
end mills

GM series

➤ Applicable workpiece material table ● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
⊙	⊙	⊙	○			○	⊙				

Code key

B213

Graphics category and identification

B214

Cutting parameters

B407

4-flute flattened end mills with straight shank and corrugated edges



Side face




Step shoulder




Straight slot


GM-4W



Corner protection





Picture 1



Picture 2

- Very suitable for high-efficiency rough machining.



Ordering number	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4W-D6.0	6.0	6	16	50	4	Picture 2	●
GM-4W-D7.0	7.0	8	20	60	4	Picture 1	●
GM-4W-D8.0	8.0	8	20	60	4	Picture 2	●
GM-4W-D9.0	9.0	10	22	75	4	Picture 1	●
GM-4W-D10.0	10.0	10	25	75	4	Picture 2	●
GM-4W-D11.0	11.0	12	26	75	4	Picture 1	●
GM-4W-D12.0	12.0	12	30	75	4	Picture 2	●
GM-4W-D16.0	16.0	16	45	100	4	Picture 2	●
GM-4W-D20.0	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material										
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy
		~40HRC	~50HRC	~55HRC	~68HRC					
○	○	○	○			○	○			

Code key

B213

Graphics category and identification

B214

Cutting parameters

B408-B409